

RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



Performance

Platform Height—Elevated

RT2669	8.0 m
RT3369	10.0 m
RT4069	12.3 m
RT4769	14.3 m

Platform Capacity

RT2669	680 kg
RT3369	454 kg
RT4069	363 kg
RT4769	363 kg
— Capacity on Deck Extension	136 kg

No. Occupants (Indoor/Outdoor)

RT2669	4/4
RT3369	4/2
RT4069	3/2
RT4769	3/2

Lift/Lower Time

RT2669	36/28 seconds
RT3369	42/33 seconds
RT4069	69/46 seconds
RT4769	81/55 seconds

Maximum Drive Height

Full Height

Weight *

RT2669	3,900 kg
RT3369	4,350 kg
RT4069	5,015 kg
RT4769	6,420 kg

Drive Speed—Lowered

5.6 km/h

Drive Speed—Elevated

0.8 km/h

Gradeability

RT2669	40%
RT3369	35%
RT4069	35%
RT4769	30%

Turning Radius (Inside)

2 m

Turning Radius (Outside)

4 m

* Certain options or country standards will increase weight

Standard Specifications

Tyres

• Tyre size (non-marking)	26 x 12 Foam Filled
---------------------------	---------------------

Engine

• Diesel Engine	Kubota D1305-E4B-J 24.8 hp (18.5 kw)
• Fuel Tank Capacity	38 L
• Drive	4WD Hydrostatic

Hydraulic System

• Hydraulic Reservoir	50 L
-----------------------	------



Standard Features

- Hydraulic Leveling Jacks (Auto Level)
- Roll-out Deck Extension
- 4WD
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Self-locking Gate
- Flashing Amber Beacon - LED
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tyres
- 240V-AC Receptacle In Platform incl. ELCB
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness
- AS/NZS 1418.10 Compliant

Accessories & Options

- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Heavy Duty Pipe Racks


RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



Dimensions

All dimensions are approximate.

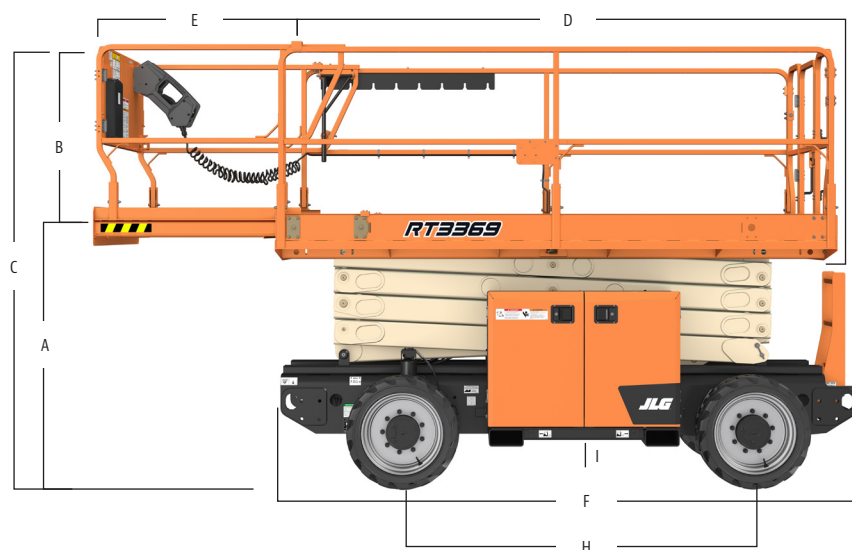

A. Platform Height – Lowered

RT2669	1.30 m
RT3369	1.46 m
RT4069	1.46 m
RT4769	1.62 m

B. Platform Railing Height*

1.14 m

C. Overall Height

RT2669	
-Rails Up	2.46 m
-Rails Folded	1.89 m
RT3369	
-Rails Up	2.61 m
-Rails Folded	2.05 m
RT4069	
-Rails Up	2.62 m
-Rails Folded	2.05 m
RT4769	
-Rails Up	2.77 m
-Rails Folded	2.21 m

D. Platform Dimensions

3.3 x 1.6 m

E. Platform Extension

1.07 m

F. Overall Machine Length

3.53 m

G. Overall Machine Width

1.76 m

H. Wheelbase

2.07 m

I. Ground Clearance

25.7 cm

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R032823



JLG Industries (Australia)

358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company