

**TADANO****HYDRAULIC TRUCK CRANE**

SPEC. SHEET NO. GT-600E-1-00202/EX-11

GT-600EX

CARRIER : TC-4255-2

GENERAL DATA

CRANE CAPACITY	60,000 kg at 3.0 m	
BOOM	5-section, 11.0 m – 43.0 m	
DIMENSION		
Overall length	approx.	13,170 mm
Overall width	approx.	3,040 mm
Overall height	approx.	3,730 mm
MASS		
Gross vehicle mass	approx.	41,300 kg
— front axle	approx.	15,800 kg
— rear axle	approx.	25,500 kg
PERFORMANCE		
Max. travelling speed	computed	84 km/h
Gradeability (tan θ)	computed	58 %

CRANE SPECIFICATIONS**MODEL**

GT-600EX

CAPACITY

60,000 kg at 3.0 m

BOOM

5-section full power partially synchronized telescoping boom of round box construction with 5 sheaves at boom head. The synchronization system consists of 2 telescope cylinders, extension cables and retraction cables. Selection of 2 boom telescoping modes.

Hydraulic cylinders fitted with holding valves.

Fully retracted length.....	11.0 m
Fully extended length.....	43.0 m
Extension speed.....	32.0 m in 135 s

JIB

2-staged swingaround boom extension. Triple offset (5°/25°/45°) type. Stows alongside base boom section.

Assistant cylinders for mounting and stowing.

Single sheave at jib head.

Length 8.8 m and 15.2 m

SINGLE TOP (AUXILIARY BOOM SHEAVE)

Single sheave.

Mounted to main boom head for single line work.

ELEVATION

By a double-acting hydraulic cylinder, fitted with holding valve.

Boom angle.....	-2° to 81°
Boom raising speed.....	20° to 60° in 39 s

HOIST-Main winch

Variable speed type with grooved drum driven by hydraulic axial piston motor through winch speed reducer. Power load lowering and hoisting.


Equipped with automatic brake (Neutral brake) and counter-balance valve.

Controlled independently of auxiliary winch.

Single line pull.....	54.9 kN {5,600 kgf}
Single line speed.....	139 m/min. (at the 4th layer)
Wire rope.....	Spin-resistant type
Diameter x length.....	19 mm x 235 m

DIMENSION

SPEC. SHEET NO. GT-600E-1-00202/EX-11

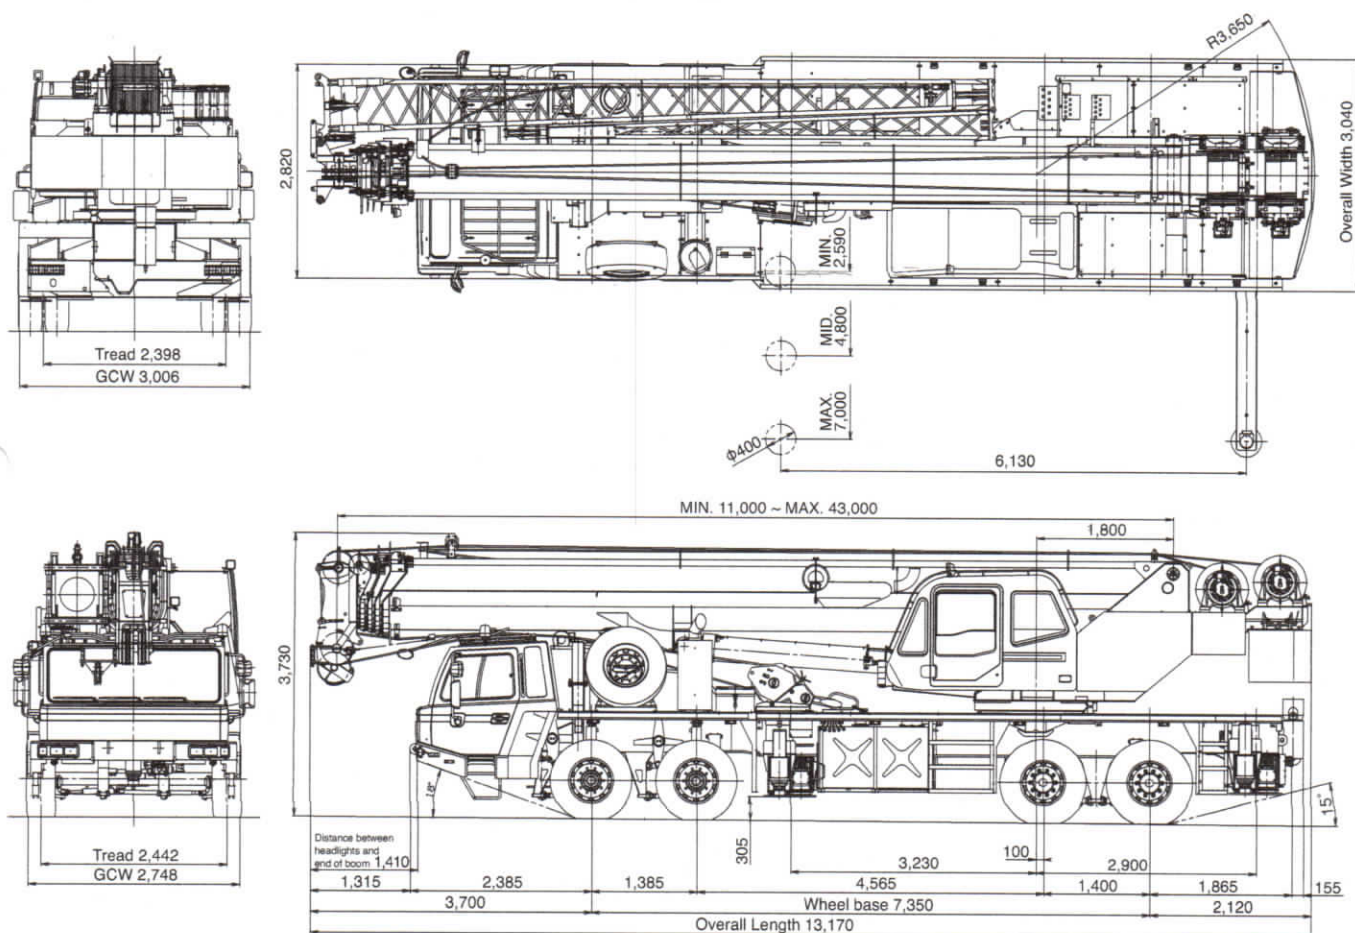

Axle Weight Distribution Chart


Unit : kg

	Total	Front	Rear
Base machine with 300L fuel:	41,300	15,800	25,500
Remove:			
1. 5.6t hook block	-150	65	-215
2. Top Jib (6.4m)	-225	-175	-50
3. Base Jib (8.8m)	-500	-490	-10
4. Single Top (Auxiliary boom sheave)	-50	-90	40
5. Spare Tire	-135	-140	5
6. Spare Tire Bracket	-30	-30	0
7. 35t hook block	-410	-280	-130
8. Counter weight and pins	-3,780	1,510	-5,290
Add:			
1. 60t hook block(optional)	570	390	180
2. 2 Persons (driver and passenger)	150	190	-40


WORKING RANGE

SPEC. SHEET NO. GT-600E-1-00202/EX-11


Telescoping mode II

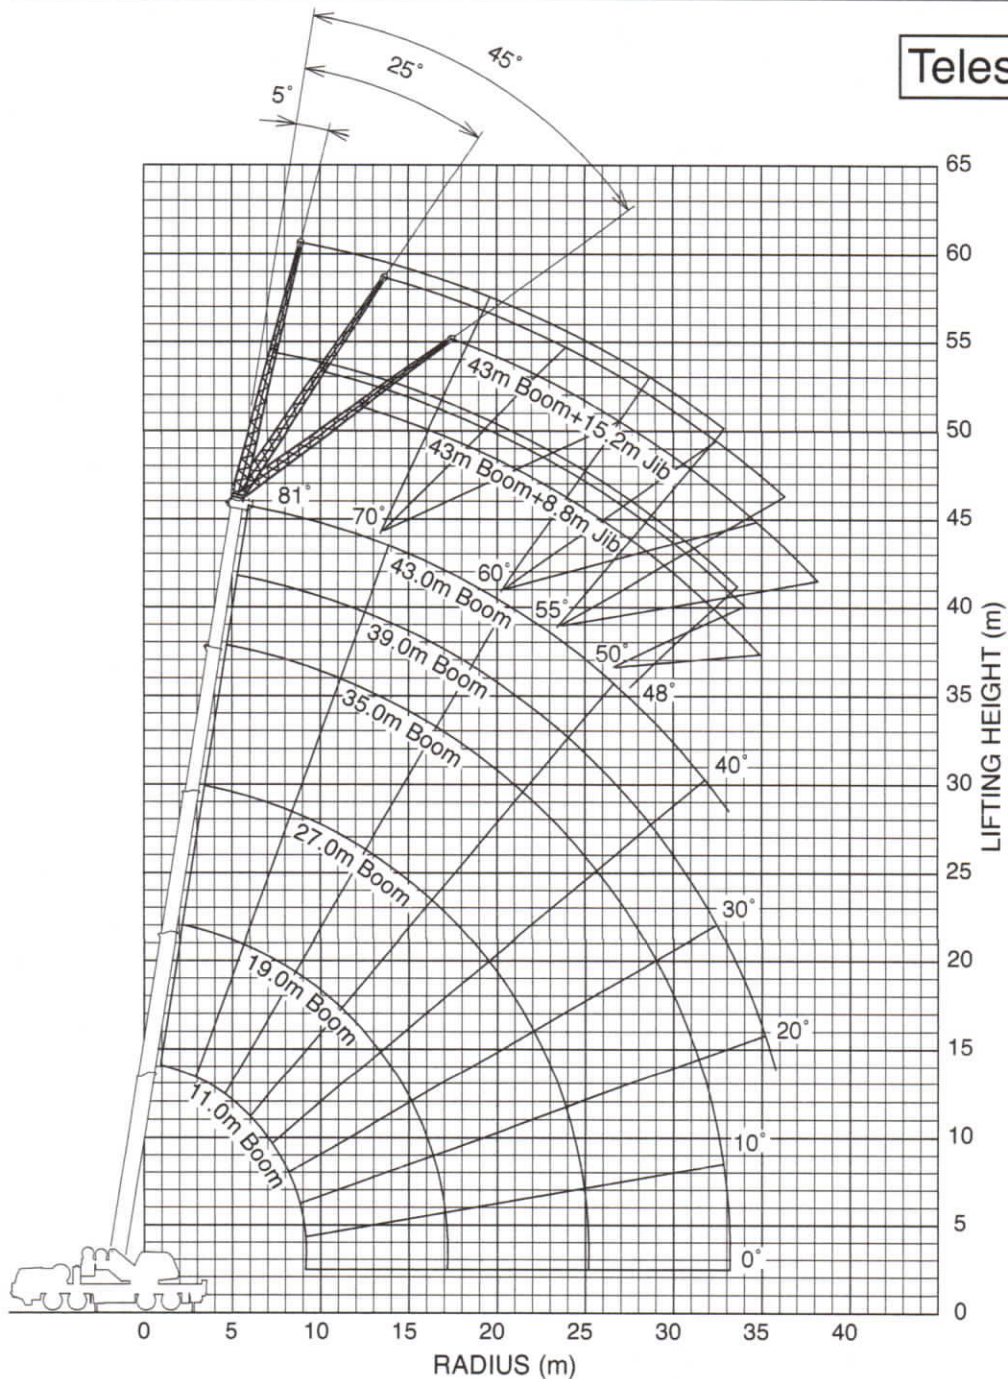


BOOM



JIB




SINGLE TOP



NOTE:

Boom and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.


Boom Length

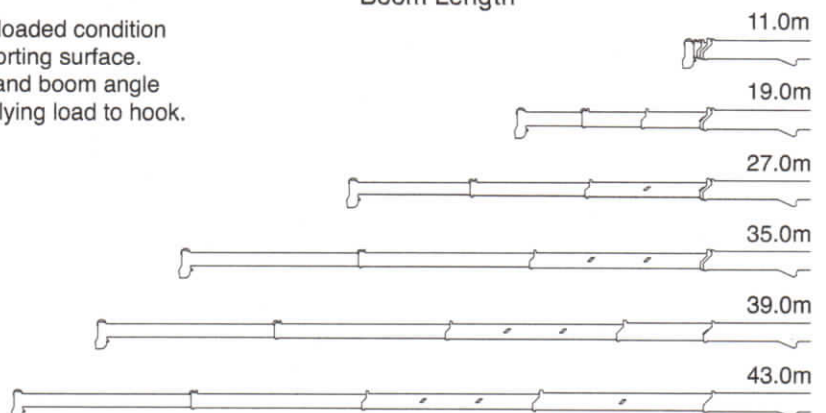


WORKING RANGE

SPEC. SHEET NO. GT-600E-1-00202/EX-11


Telescoping mode I

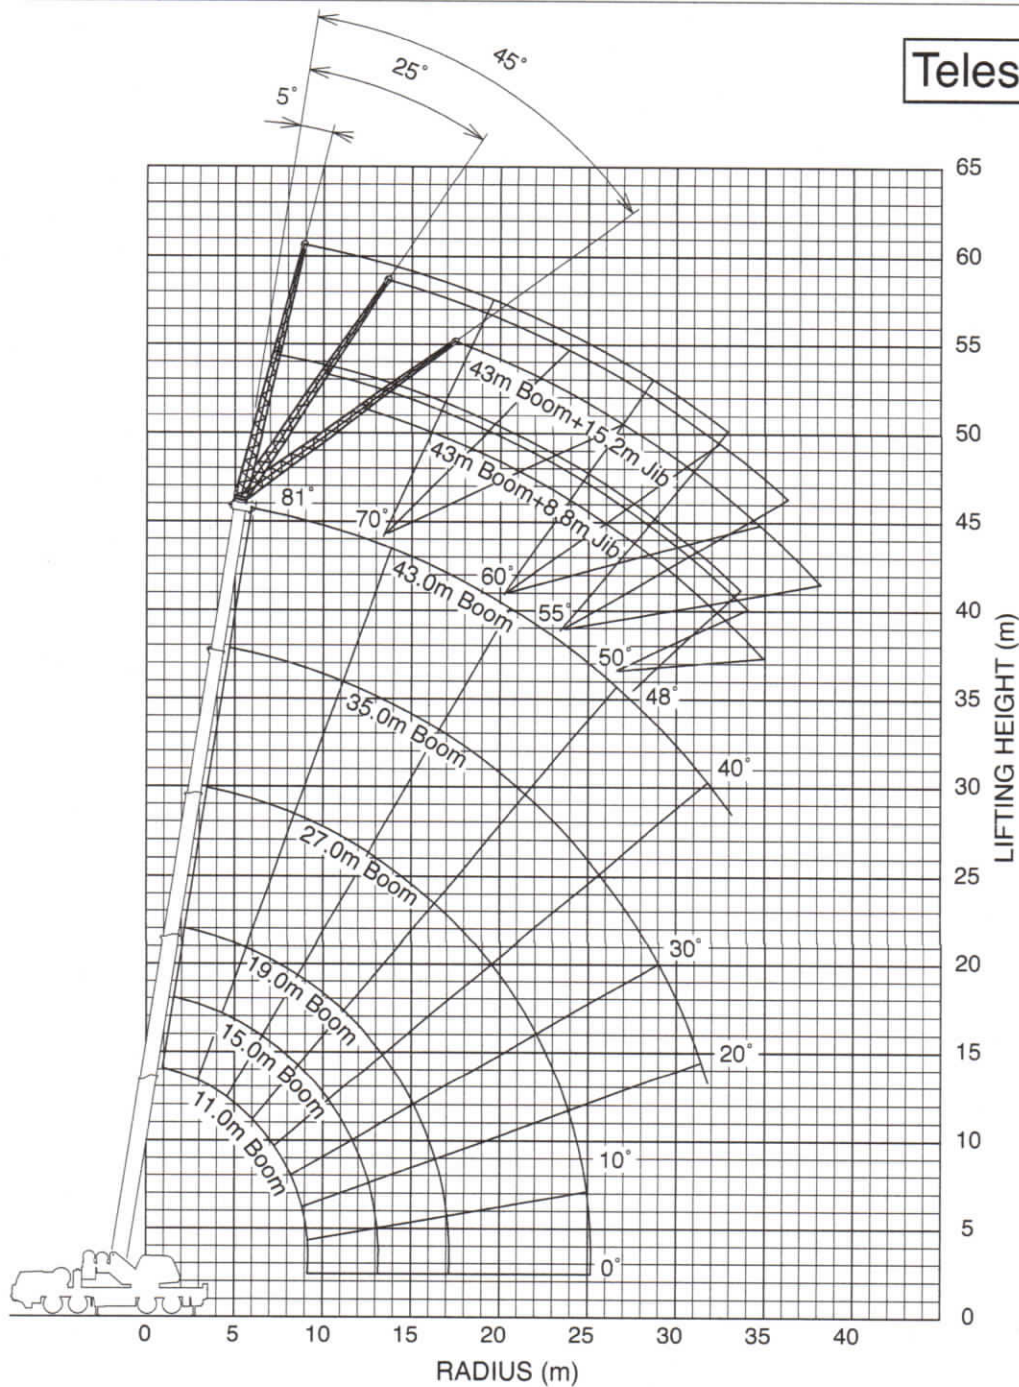


BOOM



JIB




SINGLE TOP



NOTE:

Boom and jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

Boom Length

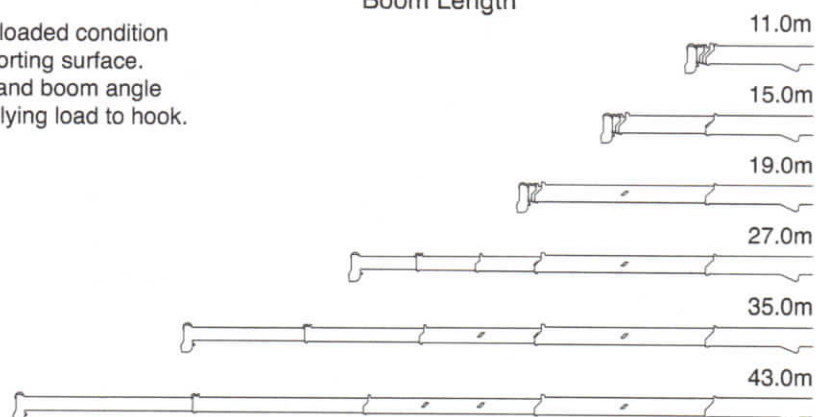

RATED LIFTING CAPACITIES (BOOM)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers fully extended 7.0m																				
B \ A	11.0m		15.0m		19.0m				27.0m				35.0m				39.0m		43.0m	
	C		C		C		C		C		C		C		C		C			
3.0	70	60.0	76	40.8	79	32.0	79	22.0												
3.5	67	47.5	74	40.8	78	32.0	78	22.0												
4.0	64	42.4	72	40.8	76	32.0	76	22.0	81	22.0	81	17.0								
4.5	61	38.1	70	37.8	75	32.0	75	22.0	80	22.0	80	17.0								
5.0	58	34.5	68	34.2	73	32.0	73	22.0	79	22.0	79	17.0								
5.5	55	31.4	66	31.1	72	30.9	71	21.4	78	21.3	78	17.0								
6.0	51	28.7	63	28.4	70	27.4	70	20.6	77	20.7	77	17.0	80	14.0	81	12.0				
6.5	47	26.4	61	26.1	68	24.0	68	19.8	76	20.0	76	16.3	80	14.0	80	12.0				
7.0	43	24.4	59	23.5	67	21.1	66	19.1	75	19.5	75	15.4	79	14.0	79	11.9	80	10.0		
7.5	39	22.7	57	20.9	65	18.8	65	18.5	74	18.8	73	14.6	78	13.5	78	11.5	80	10.0		
8.0	34	20.0	54	18.7	63	16.9	63	17.9	72	17.1	72	13.9	77	13.0	77	11.1	79	10.0		
9.0	20	15.7	49	15.0	60	13.9	60	16.8	70	14.3	70	12.6	76	12.1	76	10.3	78	10.0		
10.0			43	12.0	56	11.6	56	14.7	68	12.2	68	11.6	74	11.7	74	9.7	76	9.7		
11.0			36	9.8	52	9.5	52	12.4	65	10.5	65	10.7	72	10.2	72	9.0	75	9.2		
12.0			28	8.2	47	7.9	48	10.6	63	9.2	63	9.9	70	9.0	71	8.4	73	8.7		
14.0					37	5.5	38	7.9	58	6.9	58	8.3	67	7.1	67	7.3	70	7.5		
16.0					24	3.8	25	6.2	52	5.2	52	6.5	63	5.6	63	6.4	67	6.1		
18.0									46	3.9	46	5.2	59	4.4	59	5.4	63	5.0		
20.0									39	3.0	40	4.2	55	3.5	55	4.4	60	4.0		
22.0									31	2.2	32	3.5	50	2.7	51	3.6	56	3.2		
24.0									20	1.6	22	2.9	46	2.1	46	3.0	52	2.6		
26.0													41	1.6	41	2.5	48	2.1		
28.0													35	1.2	35	2.1	43	1.7		
30.0													28	0.8	28	1.7	39	1.3		
32.0													18	0.5	18	1.4	33	1.0		
34.0																	26	0.8		
36.0																	17	0.6		
D	0°												18°		0°		17°		37°	
Telescoping conditions(%)																				
Telescoping Mode	I, II	I	I	I	II	I	II	I	II	I	II	I	II	II	II	I, II				
2nd boom	0	50	100		0	100		0		100		0		50		100				
3rd boom	0	0	0		33	33		66		66		66		100		100				
4th boom	0	0	0		33	33		66		66		66		100		100				
Top boom	0	0	0		33	33		66		66		66		100		100				

A: Boom length (m)

B: Load radius (m)

C: Loaded boom angle (°)

D: Minimum boom angle (°) for indicated length (no load)

NOTES :

- Rated lifting capacities shown in the table are based on condition that the crane is set on firm level surface. Those above bold lines are based on crane strength and those below, on its stability.
- Rated lifting capacities based on crane stability are according to ISO 4305 / DIN 15019 part 2.
- The mass of the hook (570kg for *60t capacity, 410kg for *35t capacity, 150kg for *5.6t capacity), slings and all similarly used load handling devices must be considered as part of the load and must be deducted from the lifting capacities.
* : Optional
- For rated lifting capacity of single top, reduce the rated lifting capacities of relevant boom according to a weight reduction for auxiliary load handling equipment. Capacities of single top shall not exceed 5,600 kg including main hook.
- Standard number of part lines for each boom length is as shown below. Load per line should not surpass 54.9 kN {5,600 kgf} for main winch and auxiliary winch.

Boom length	11.0m	11.0m to 15.0m	15.0m to 19.0m	19.0m to 27.0m	27.0m to 43.0m	Jib / Single top
No. of part lines	12	10	7	5	4	1

The lifting capacity data stored in the AUTOMATIC MOMENT LIMITER (AML) is based on the standard number of parts of line listed in the chart.

Maximum lifting capacity is restricted by the number of parts of line of AUTOMATIC MOMENT LIMITER (AML).

- Without front jack extended, when the boom is within the Over-front, rated lifting capacities are different from those for the boom in the Over-side and Over-rear.

RATED LIFTING CAPACITIES (JIB)

SPEC. SHEET NO. GT-600E-1-00202/EX-11

UNIT:x1000kg

Outriggers fully extended 7.0m													
C	43.0m Boom + 8.8m Jib						C	43.0m Boom + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt			5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W		R	W	R	W	R	W
81°	9.2	4.00	12.2	3.58	14.1	2.47	81°	11.3	2.60	16.2	1.69	19.5	1.17
80°	10.2	4.00	13.3	3.50	15.1	2.44	80°	12.5	2.60	17.4	1.65	20.6	1.15
79°	11.3	4.00	14.2	3.42	15.9	2.40	79°	13.6	2.60	18.4	1.61	21.5	1.13
78°	12.3	4.00	15.1	3.32	16.8	2.37	78°	14.8	2.60	19.5	1.58	22.4	1.12
77°	13.3	4.00	16.0	3.22	17.6	2.34	77°	15.9	2.56	20.4	1.54	23.4	1.10
76°	14.2	3.85	16.9	3.12	18.5	2.32	76°	17.0	2.46	21.5	1.51	24.3	1.09
75°	15.2	3.72	17.7	3.04	19.3	2.29	75°	18.1	2.38	22.4	1.48	25.2	1.08
73°	17.0	3.50	19.5	2.88	21.0	2.24	73°	20.1	2.22	24.3	1.43	27.0	1.05
70°	19.5	3.20	22.0	2.68	23.3	2.18	70°	23.0	2.01	27.2	1.35	29.4	1.02
68°	21.4	3.03	23.6	2.56	24.8	2.14	68°	25.1	1.90	29.0	1.31	31.1	1.00
65°	23.7	2.52	25.9	2.25	27.0	2.09	65°	27.8	1.75	31.8	1.25	33.5	0.98
63°	25.1	2.13	27.2	1.92	28.4	1.86	63°	29.5	1.52	33.3	1.21	35.1	0.97
60°	27.3	1.66	29.3	1.52	30.4	1.48	60°	31.8	1.14	35.7	0.99	37.1	0.95
58°	28.8	1.40	30.7	1.28	31.7	1.24	58°	33.4	0.92	37.0	0.81	38.2	0.77
55°	30.9	1.07	32.7	0.96	33.4	0.93	55°	35.7	0.66	39.1	0.56	40.1	0.53
53°	32.2	0.86	33.9	0.77	34.6	0.75							
50°	34.1	0.58	35.7	0.52	36.4	0.51							
48°	35.3	0.43											

UNIT:x1000kg

Outriggers fully extended 7.0m													
C	39.0m Boom (telescoping mode II) + 8.8m Jib						C	39.0m Boom (telescoping mode II) + 15.2m Jib					
	5°Tilt		25°Tilt		45°Tilt			5°Tilt		25°Tilt		45°Tilt	
	R	W	R	W	R	W		R	W	R	W	R	W
81°	8.1	4.40	11.0	3.58	13.0	2.47	81°	10.2	2.60	15.0	1.69	18.3	1.17
80°	9.0	4.40	11.9	3.50	13.8	2.44	80°	11.3	2.60	16.0	1.65	19.3	1.15
79°	9.9	4.40	12.8	3.42	14.7	2.40	79°	12.3	2.60	16.9	1.61	20.2	1.13
78°	10.9	4.40	13.7	3.35	15.5	2.37	78°	13.4	2.60	17.9	1.58	21.0	1.12
77°	11.8	4.40	14.5	3.28	16.3	2.34	77°	14.4	2.56	18.8	1.54	21.9	1.10
76°	12.6	4.24	15.3	3.21	17.1	2.32	76°	15.4	2.46	19.8	1.51	22.7	1.09
75°	13.5	4.09	16.1	3.15	17.8	2.29	75°	16.3	2.38	20.7	1.48	23.5	1.08
73°	15.1	3.85	17.8	3.04	19.3	2.24	73°	18.2	2.22	22.5	1.43	25.1	1.05
70°	17.6	3.51	20.1	2.89	21.5	2.18	70°	20.9	2.01	25.1	1.35	27.4	1.02
68°	19.2	3.32	21.7	2.78	22.8	2.14	68°	22.7	1.90	26.8	1.31	28.9	1.00
65°	21.5	3.07	23.8	2.61	24.8	2.09	65°	25.3	1.75	29.1	1.25	31.0	0.98
63°	23.0	2.93	25.2	2.52	26.2	2.07	63°	27.0	1.67	30.8	1.21	32.4	0.97
60°	25.1	2.58	27.2	2.31	28.2	2.03	60°	29.4	1.56	33.0	1.16	34.4	0.95
58°	26.5	2.26	28.5	2.02	29.5	1.93	58°	31.1	1.49	34.5	1.13	35.7	0.94
55°	28.3	1.83	30.3	1.65	31.1	1.59	55°	33.2	1.29	36.5	1.09	37.5	0.93
53°	29.6	1.59	31.4	1.44	32.1	1.40	53°	34.6	1.10	37.8	0.96	38.6	0.90
50°	31.4	1.28	33.1	1.17	33.7	1.14	50°	36.6	0.85	39.4	0.74	40.0	0.71
48°	32.5	1.10	34.1	1.01	34.6	0.99	48°	37.8	0.70	40.5	0.62	41.0	0.59
45°	34.2	0.87	35.6	0.80	35.9	0.79	45°	39.6	0.51	42.1	0.45	42.3	0.44
43°	35.3	0.74	36.6	0.68			43°	40.8	0.41				
40°	36.8	0.57	37.4	0.52									
38°	37.7	0.46	38.8	0.43									

C: Boom angle
R: Load radius (m)
W: Rated lifting capacity