

Long Load Frame - SWL 3.2 Tonne \* NEW DESIGN - Quick Hitch Frame \*

## AL930D 10T Wheel Loader

### FEATURES


- 4 Speed Transmission
- Integrated Air Conditioned & Heated Cabin
- Suspension Seat
- Single Lever Hydraulic Pilot Control
- Full Powered Third Function Hydraulics (3rd Valve)
- Standard Inclusion: Hydraulic Quick Hitch, Fork Frame with Tines, Bucket (with bolt on Cutting Edge) And 4 in 1 Bucket
- Additional Buckets and Attachments Available: Scales (Weighing System) & Printer, Hay Forks etc..

### ENGINE

|                  |                                                      |
|------------------|------------------------------------------------------|
| Model            | DEUTZ WP6G125E22                                     |
| Type             | 6 Cylinder in-line<br>Direct injection Water Cooling |
| Rated Power      | 92kW / 125HP                                         |
| Rated RPM        | 2,400 RPM                                            |
| Displacement     | 6.75L                                                |
| Fuel Consumption | ≤225g / kw.h                                         |
| Max Torque       | 540Nm                                                |

### TRANSMISSION

|                   |                                   |
|-------------------|-----------------------------------|
| Type              | Planetary Powershift              |
| Transmission Pump | Gear driven hydraulic pump        |
| Working Pressure  | 1.6Mpa                            |
| Speed/Shift       | 4 Forward / 2 Reverse Max 40 KM/H |

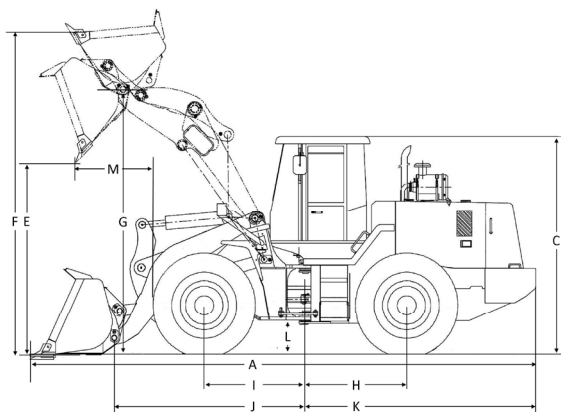

### DIMENSIONS


|                                               |            |
|-----------------------------------------------|------------|
| A Length (bucket on ground)                   | 7,460 mm   |
| B Width (outside tyres)                       | 2,205 mm   |
| C Height                                      | 3,150 mm   |
| D Bucket Width                                | 2,430 mm   |
| E Max. Dump Height (bucket rolled forward)    | 3,130 mm   |
| F Max. Dump Height (bucket rolled back)       | 4,830 mm   |
| G Max. Height to Centre Pivot Pin (full lift) | 4,240 mm   |
| H Centre to Centre Rear Axle                  | 1,800 mm   |
| I Centre to Centre Front Axle                 | 945 mm     |
| J Centre to Loadframe                         | 2,510 mm   |
| L Underbelly Clearance                        | 390 mm     |
| M Front Wheel to Bucket Edge                  | 1,440 mm   |
| Breakout Force                                | ≥127kn     |
| Operating Weight/Safe Work Load               | 10.0/3.2 T |
| Bucket Capacity                               | 1.9 m³     |
| Tyre Specification                            | 17.5-25    |

### HYDRAULICS

|                    |                                      |
|--------------------|--------------------------------------|
| Type               | Single lever hydraulic pilot control |
| Pump               | Gear driven Hydraulic Pump           |
| Flow Rate          | 100 L                                |
| Working Pressure   | 2000psi                              |
| Lifting Cycle Time | 9.15 seconds                         |

### STEERING

|                   |                                     |
|-------------------|-------------------------------------|
| Type              | Full-hydraulic articulated steering |
| Steering Orbitrol | BZZ5-350C                           |
| Steering Angle    | 35°                                 |
| Working Pressure  | 10Mpa                               |

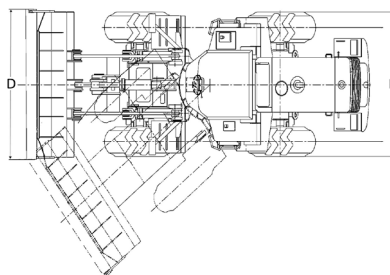

28-30 Hydrive Close, Dandenong South Vic 3175  
 Phone: 03 9799 7707 Mobile: 0409 307 500  
 Email: sales@activemachinery.com.au  
 Website: [www.activemachinery.com.au](http://www.activemachinery.com.au)

**PRICE:**  
\$