GP350
380 kVA PERKINS POWERED



TECHNICAL OVERVIEW	
MODEL	GP350
PRIME POWER	350 kVA / 280 kW
STANDBY POWER	380 kVA / 308 kW
FUEL TYPE	DIESEL
SPEED	1500 RPM
TYPE	HEAVY DUTY
FREQUENCY	50Hz
PHASE/VOLTAGE	THREE PHASE / 415V
FUEL CAPACITY	800 LTR

ENGINE	
MANUFACTURER	PERKINS
ENGINE MODEL	2206C-E13TAG2
CYLINDER/ CAPACITY	6 CYL / 13 LTR
INDUCTION	TURBO AFTER COOLED
FUEL CONSUMPTION	75 L/HR @ 100% LOAD 55 L/HR @ 75% LOAD 40 L/HR @ 50% LOAD
GOVERNOR	ELECTRONIC
OIL CAPACITY	40 LTR
COOLANT CAPACITY	51 LTR

FEATURES
HEAVY DUTY SKID BASE
HIGH AMBIENT COOLING PACKAGE
BATTERY CHARGER AND ISOLATOR

CONTROLS	
BRAND AND MODEL	DEEPSEA 7420 MKII
CIRCUIT BREAKER	FOUR POLE

ALTERNATOR	
BRAND AND MODEL	LEROY SOMERS LSA47.2VS1
TYPE	BRUSHLESS / AVR
HARMONIC DISTORTION	LESS THAN 5%
INSULATION CLASS	CLASS H

OPTIONS
JACKET WATER AND ANTI-CONDENSATION HEATERS
SYNCHRONISING CONTROLLER OPTIONS
AUTO TRANSFER SWITCHES (ATS)

DIMENSIONS	
LENGTH / WIDTH / HEIGHT	333 CM / 121 CM / 215 CM
WEIGHT (DRY)	3134 KG

PRIME POWER (PRP): Continuous operation at variable load unlimited hours per year, with an average load factor of 75%. 10% overload capability is 1 hour in a 12 hour period of operation.

STANDBY POWER RATING (ESP): Emergency power supply with an average load factor of 85%. No overload capability. Limited to 400 hours per year.

Powered by Perkins · LEROY-SOMER · DSE DEEP SEA ELECTRONICS

Materials and specifications are subject to change. Specification sheets are current as of 30/6/2025.

1300 305 912
sales@genelite.com.au

GP350S
400 kVA PERKINS POWERED



TECHNICAL OVERVIEW	
MODEL	GP350S
PRIME POWER	350 kVA / 280 kW
STANDBY POWER	400 kVA / 320 kW
FUEL TYPE	DIESEL
SPEED	1500 RPM
TYPE	HEAVY DUTY
FREQUENCY	50Hz
PHASE/VOLTAGE	THREE PHASE / 415V
FUEL CAPACITY	1650 LTR

ENGINE	
MANUFACTURER	PERKINS
ENGINE MODEL	2206C-E13TAG2
CYLINDER/ CAPACITY	6 CYL / 13 LTR
INDUCTION	TURBO AFTERCOOLED
FUEL CONSUMPTION	75 L/HR @ 100% LOAD 55 L/HR @ 75% LOAD 40 L/HR @ 50% LOAD
GOVERNOR	ELECTRONIC
OIL CAPACITY	40 LTR
COOLANT CAPACITY	51 LTR

FEATURES
SILENCED CANOPY – 75 dB(A) @ 7M
HEAVY DUTY SKID BASE WITH FORK POCKETS
BUNDED FUEL TANK – 30 HOUR RUN TIME @ 75% LOAD
CANOPY – GALVANISED POWDER COAT
BATTERY CHARGER AND ISOLATOR

CONTROLS	
BRAND AND MODEL	DEEPSEA 7420 MKII
CIRCUIT BREAKER	FOUR POLE

ALTERNATOR	
BRAND AND MODEL	LEROY SOMER LSA47.2VS1
TYPE	BRUSHLESS / AVR
HARMONIC DISTORTION	LESS THAN 5%
INSULATION CLASS	CLASS H

OPTIONS
OUTLETS
MINE SPEC
JACKET WATER HEATER
EXTERNAL FUEL CONNECTION
AUTO TRANSFER SWITCHES (ATS)

DIMENSIONS	
LENGTH / WIDTH / HEIGHT	424 CM / 161 CM / 247 CM
WEIGHT (DRY)	4684 KG

PRIME POWER (PRP): Continuous operation at variable load unlimited hours per year, with an average load factor of 75%. 10% overload capability is 1 hour in a 12 hour period of operation.


STANDBY POWER RATING (ESP): Emergency power supply with an average load factor of 85%. No overload capability. Limited to 400 hours per year.

Powered by Perkins LEROY-SOMER DSE DEEP SEA ELECTRONICS

Materials and specifications are subject to change. Specification sheets are current as of 30/6/2025.

1300 305 912
sales@genelite.com.au

GC350
370 kVA CUMMINS POWERED

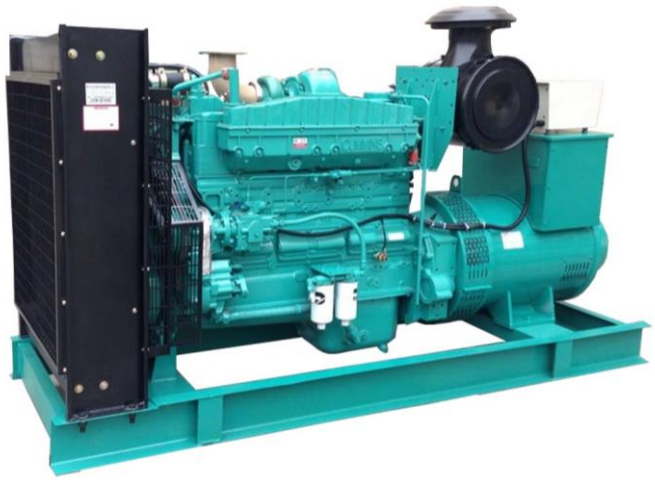

TECHNICAL OVERVIEW	
MODEL	GC350
PRIME POWER	350 kVA / 280 kW
STANDBY POWER	370 kVA / 296 kW
FUEL TYPE	DIESEL
SPEED	1500 RPM
TYPE	HEAVY DUTY
FREQUENCY	50Hz
PHASE/VOLTAGE	THREE PHASE / 415V
FUEL CAPACITY	410 LTR

ENGINE	
MANUFACTURER	CUMMINS
ENGINE MODEL	NTA855G4
CYLINDER/ CAPACITY	6 CYL / 8.5 LTR
INDUCTION	TURBO AFTER COOLED
FUEL CONSUMPTION	76 L/HR @ 100% LOAD 59 L/HR @ 75% LOAD 39 L/HR @ 50% LOAD
GOVERNOR	ELECTRONIC
OIL CAPACITY	38.6 LTR
COOLANT CAPACITY	61 LTR

FEATURES
HEAVY DUTY SKID BASE
HIGH AMBIENT COOLING PACKAGE
BATTERY CHARGER AND ISOLATOR

CONTROLS	
BRAND AND MODEL	DEEPSEA 7420 MKII
CIRCUIT BREAKER	FOUR POLE

ALTERNATOR	
BRAND AND MODEL	STAMFORD HCi444E
TYPE	BRUSHLESS / AVR
HARMONIC DISTORTION	LESS THAN 5%
INSULATION CLASS	CLASS H

OPTIONS
JACKET WATER AND ANTI-CONDENSATION HEATERS
SYNCHRONISING CONTROLLER OPTIONS
AUTO TRANSFER SWITCHES (ATS)

DIMENSIONS	
LENGTH / WIDTH / HEIGHT	345 CM / 113 CM / 183 CM
WEIGHT (DRY)	3159 KG

PRIME POWER (PRP): Continuous operation at variable load unlimited hours per year, with an average load factor of 75%. 10% overload capability is 1 hour in a 12 hour period of operation.

STANDBY POWER RATING (ESP): Emergency power supply with an average load factor of 85%. No overload capability. Limited to 400 hours per year.

Materials and specifications are subject to change. Specification sheets are current as of 30/6/2025.

GC350S
385 kVA CUMMINS POWERED



TECHNICAL OVERVIEW	
MODEL	GC350S
PRIME POWER	350 kVA / 280 kW
STANDBY POWER	385 kVA / 308 kW
FUEL TYPE	DIESEL
SPEED	1500 RPM
TYPE	HEAVY DUTY
FREQUENCY	50Hz
PHASE/VOLTAGE	THREE PHASE / 415V
FUEL CAPACITY	1650 LTR

ENGINE	
MANUFACTURER	CUMMINS
ENGINE MODEL	NTAA855-G4
CYLINDER/ CAPACITY	6 CYL / 14 LTR
INDUCTION	TURBO AFTER COOLED
FUEL CONSUMPTION	76 L/HR @ 100% LOAD 57 L/HR @ 75% LOAD 39 L/HR @ 50% LOAD
GOVERNOR	ELECTRONIC
OIL CAPACITY	38.6 LTR
COOLANT CAPACITY	60.6 LTR

FEATURES
SILENCED CANOPY – 75.7 dB(A) @ 7M
HEAVY DUTY SKID BASE WITH FORK POCKETS
BUNDED FUEL TANK – 29 HOUR RUN TIME @ 75% LOAD
CANOPY – GALVANISED POWDER COAT
BATTERY CHARGER AND ISOLATOR

CONTROLS	
BRAND AND MODEL	DEEPSEA 7420 MKII
CIRCUIT BREAKER	FOUR POLE

ALTERNATOR	
BRAND AND MODEL	STAMFORD S4L1D-E4
TYPE	BRUSHLESS / AVR
HARMONIC DISTORTION	LESS THAN 5%
INSULATION CLASS	CLASS H

OPTIONS
OUTLETS
MINE SPEC
JACKET WATER HEATER
EXTERNAL FUEL CONNECTION
AUTO TRANSFER SWITCHES (ATS)

DIMENSIONS	
LENGTH / WIDTH / HEIGHT	424.2 CM / 142.3 CM / 24.26 CM
WEIGHT (DRY)	4790 KG

PRIME POWER (PRP): Continuous operation at variable load unlimited hours per year, with an average load factor of 75%. 10% overload capability is 1 hour in a 12 hour period of operation.

STANDBY POWER RATING (ESP): Emergency power supply with an average load factor of 85%. No overload capability. Limited to 400 hours per year.

Materials and specifications are subject to change. Specification sheets are current as of 30/6/2025.