

SWIFT EQUIPMENT

ACCESS EQUIPMENT SPECIALISTS

RT0814

RT SCISSOR & DP35 TRAILER PACKAGE

FEATURES

-  **NARROW AND COMPACT UNIT**
-  **TOWABLE**
-  **EASY TO OPERATE**
-  **ROLL-OUT DECK EXTENSION FOR EXTRA REACH**
-  **IDEAL FOR OUTDOOR WORK AND ROUGH TERRAIN**

The Swift RT0814 is a rugged, towable 27ft rough terrain scissor lift that delivers 4WD diesel power, go-anywhere performance, and jobsite-ready reliability to keep your crew productive anywhere



SPECIFICATIONS

Max. working height: **10.1m** (Outrigger deployed)

Max. platform height: **8.1m** (Outrigger deployed)

Platform size (stowed): **1.4m x 2.727m**

Platform size (extended): **1.4m x 3.93m**

Extension deck length: **1.2m**

Overall width: **1.45m**

Overall length: **3.310m**

Stowed height: **2.5m**

Min. height (guardrails folded): **2.1m**

Ground clearance: **280mm**

Weight: **2796 KG**

Platform capacity (SWL): **300kg**

Max. drive speed (stowed): **3.89km/h**

Max. drive speed (elevated): **0.61km/h**

Raise/lower time: **19/30 sec** (raise speed can adjust)

Gradeability: **35%**

Max. outrigger leveling (front to rear): **6°**

Max. outrigger leveling (side to side): **10°**

Tyres: 23" x 8.5" x 12" non-marking, solid foam filled

Controls: **proportional joystick**

Drive system: **4-wheel drive**

Power source: **Yanmar Diesel 3TNV80F-NXDS**

Power: **18.4kW**



TRAILER SPECIFICATIONS

A Internal bed width: 1.7m



B Width exc marker lap: 2.32m

C Overall width: 2.5m

D Load bed length: 3.2m

E Overall length: 5.2m

F Load bed height: 0.40m

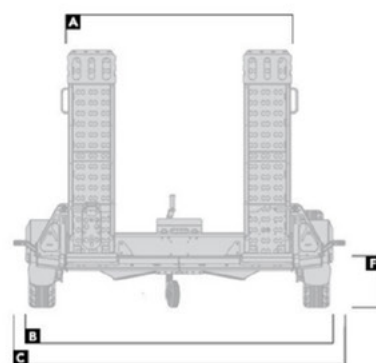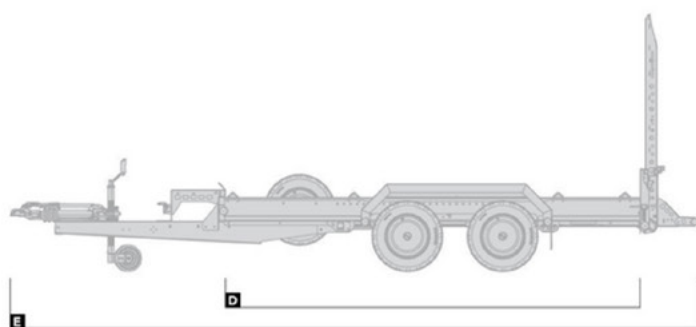

TRAILER FEATURES

Gross kg: 3,500

Load kg: 2,828

Tare weight: 682

Full LED Lighting

Galvanised Steel

Heavy Duty Jockey Wheel

Low tow hitch

SWIFT EQUIPMENT

ACCESS EQUIPMENT SPECIALISTS

1300 477 055 / SALES@SWIFTEQUIPMENT.COM.AU / SWIFTEQUIPMENT.COM.AU

Scan for images,
videos and pricing

